
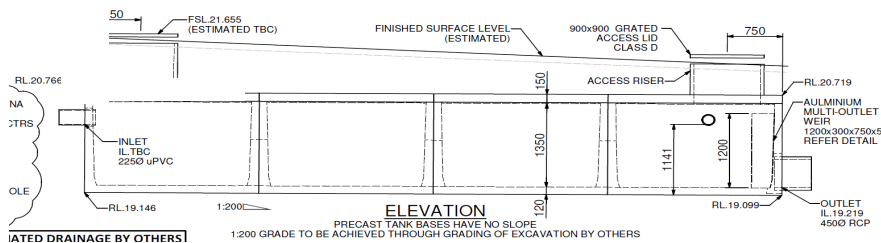


SPEL Vault

Precast Concrete Tank

55,000L SPELVault Modular Precast Detention Tank

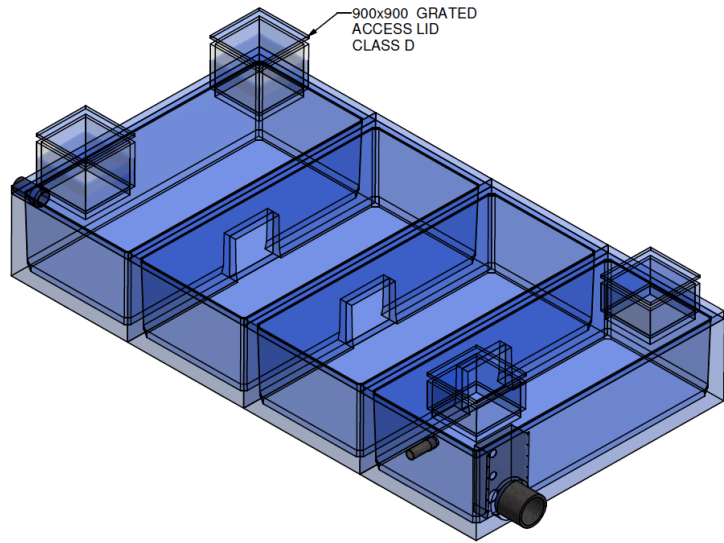

SPELVault

Our range of precast concrete tanks are proudly manufactured at SPEL's own production facility.

The SPELVault utilises the latest Engineering precast technologies, including 50MPa concrete and a variety of reinforcement to enhance structural strength. The SPELVault delivers a truck trafficable concrete tank solution that is optimised in design to achieve the best freight to site efficiencies.

Case Study

All tanks placed by 11:30am, ready to be backfilled and truck trafficable immediately.

No issue of a large excavation on-site for extended periods.

OH&S benefits. Tanks supplied to site fully cured to 50MPa. Construction traffic can access whole of site immediately. On-site efficiencies.

Fast install. Less Project Management supervision needed & less exposure to delays from inclement weather. Construction program gains.

The SPELVault is a robust solution for stormwater detention typically installed under carparks in commercial premises, or the common driveways in multi-unit developments.

